

Wirefab Industries **ELS**-Efficient Lighting Solution

Catalog: Opus panel lights

Energy saving LED light guided panel fixture produces more light for less power

WHAT'S INCLUDED



1 Opus LED light fixture with mounting kit (ready to install)

OPTIONS

- LED Panel lights with dimmer control
- LED Panel lights with standard switch

SPECIFICATIONS

- Lamp Type: LED
- Luminous Flux: 3600 lumen
- Power Consumption: 40 Watts
- Efficacy: 85 lumen per watt
- Color Rendering Index (CRI): ≥ 85
- Color Temperature (CCT): 4200K (cool white)
- Lifespan: 50000 hours
- Frame Material: Anodized Aluminum
- Diffusing surface: Transparent PMMA acrylic
- Ingress Protection: IP56
- Certification: UL & cUL , DLC , RoHS
- Warranty: 5 year limited warranty. Complete warranty terms available at
- Weight: 3.6kg
- Fixture size: 600mm \times 600mm \times 10mm

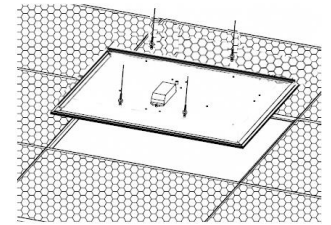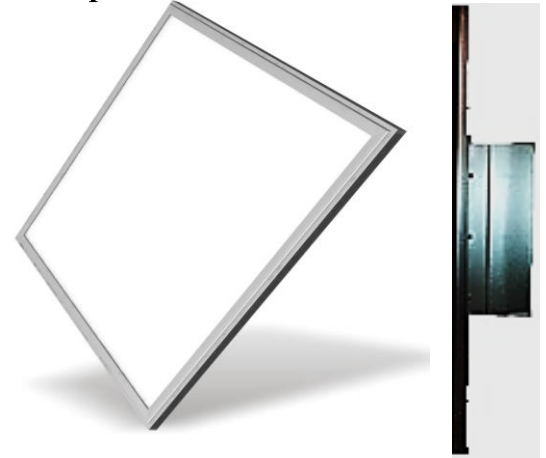


MOUNTING OPTION

- Recessed (Drop) Ceiling (2' x 2' grid)
- Suspension Cable
- Surface mount Bracket



INSTALLATION

Drivers and internal components accessed via plenum. Driver tray may be removed from fixture during service. Suitable for drop ceiling applications



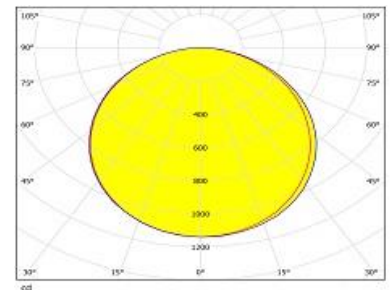

PHOTOMETRIC CURVE

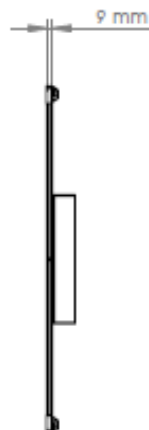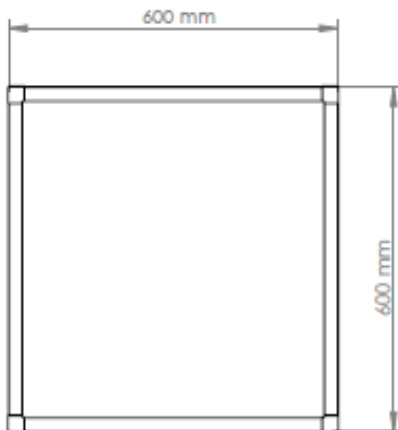

DIMENSIONS



APPLICATION AREAS

-  Educational Institute
-  Office
-  Hospital
-  Retail Store